



Documentation Guidelines

Documentation relating to services provided by Kloud 7 LLC are informational guidelines that showcase technical details and use case scenarios designed to enhance product usability. Please contact hello@kloud7.com or call 844-855-6837 for all additional inquiries.

 844-855-6837

 www.kloud7.com

Voicemail Manual

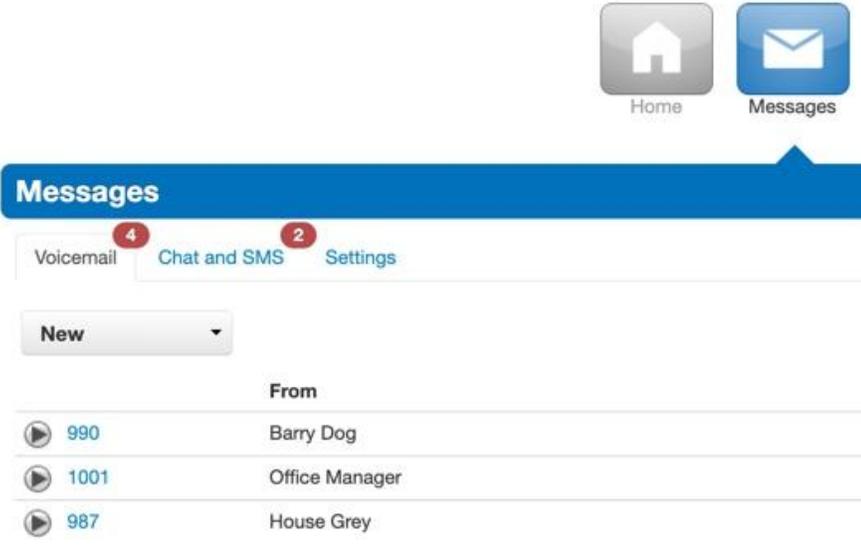
Voicemail is a fundamental telecommunications feature. This guide explains how to access voicemail boxes depending on the means of communication, how to configure voicemail beyond the system defaults, and the voicemail IVR tree.

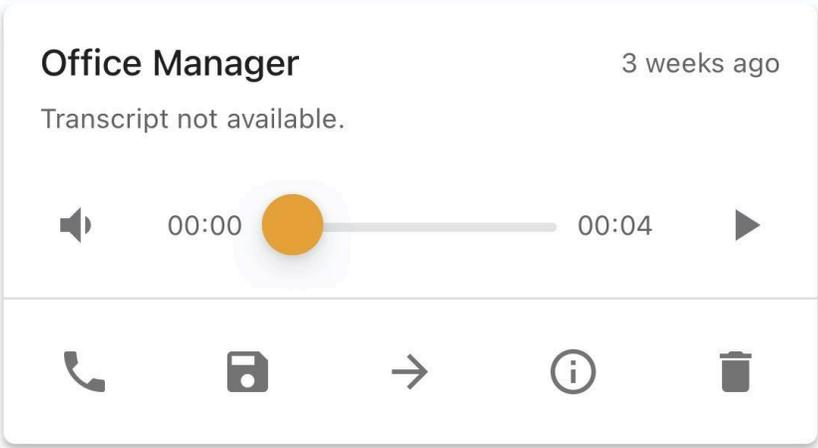
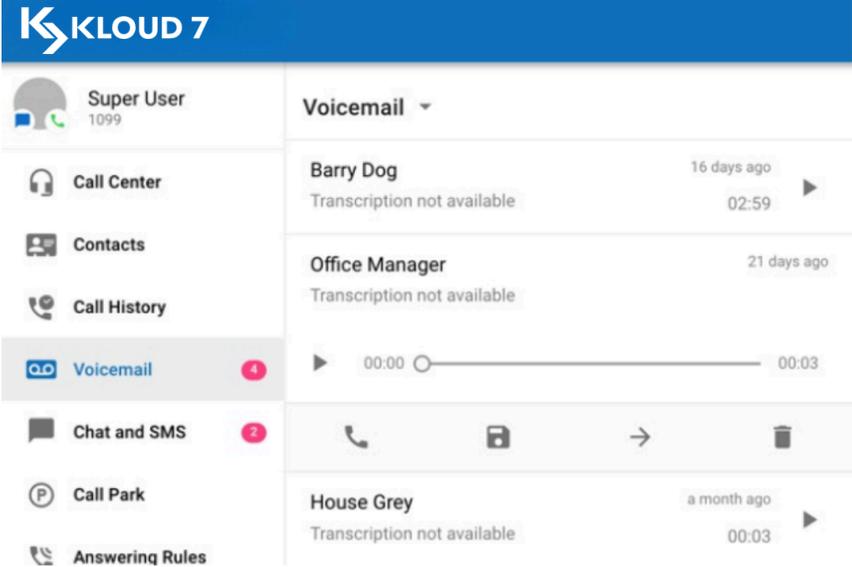
Checking Voicemails

There are many methods for checking voicemail messages.

Refer to the following table based on preferred means of communication:

Means of Communication	How to Check Voicemails
Hard Phone - Button	<p>VoIPdesk phones have a pre-configured voicemail button. The location of this button is dependent on the model and brand.</p> <ol style="list-style-type: none"> 1. Look for a voicemail icon button near the dial pad: <div data-bbox="597 1339 688 1423" data-label="Image">  </div> 2. Or a message icon button near the dial pad: <div data-bbox="594 1497 701 1575" data-label="Image">  </div> 3. Or the "Messages" option in the Main Menu: <div data-bbox="594 1633 709 1730" data-label="Image">  </div> <p>Any of these actions will connect you straight to that device's voicemail box. Then enter the pin to access messages.</p>

<p>Hard Phone - On-Net Dialing</p>	<p>The voicemail box can also be accessed by dialing an extension. By default, x5001 connects users to their voicemail box and x5000 allows users to check a different voicemail box. Voicemail pins are still required to access messages.</p>								
<p>Hard Phone - Off-Net Dialing</p>	<p>Read "How Can I Check Voicemail Messages Remotely?" to access a voicemail box from an off-net number. Once configured, the user can check voicemail messages by calling their direct phone number and pressing the # or * key (depending on what was configured) once the voicemail greeting starts playing.</p>								
<p>User Portal</p>	<p>Navigate to the User Portal > Messages.</p> <p>Options here are to play a voicemail, call to play, forward, download, or delete.</p>  <table border="1" data-bbox="516 1409 1377 1577"> <thead> <tr> <th></th> <th>From</th> </tr> </thead> <tbody> <tr> <td> 990</td> <td>Barry Dog</td> </tr> <tr> <td> 1001</td> <td>Office Manager</td> </tr> <tr> <td> 987</td> <td>House Grey</td> </tr> </tbody> </table>		From	990	Barry Dog	1001	Office Manager	987	House Grey
	From								
990	Barry Dog								
1001	Office Manager								
987	House Grey								
<p>K7 One mobile iOS / Android</p>	<p>Navigate to the K7 One mobile app > Voicemail tab.</p> <p>Options in both iOS and Android are playback, return the call, save the voicemail, forward, move to trash, and more options (adding as a contact, sending an SMS, etc.).</p>								

	 <p>Office Manager 3 weeks ago Transcript not available.</p> <p>00:00 00:04</p> <p>Phone, Save, Forward, Info, Delete icons</p>
<p>K7 One mobile Web</p>	<p>Navigate to the User Portal > "Apps" dropdown > Portal Web Phone.</p> <p>Voicemail options are playback, save, forward, and delete.</p>  <p>KLOUD 7</p> <p>Super User 1099</p> <p>Call Center</p> <p>Contacts</p> <p>Call History</p> <p>Voicemail 4</p> <p>Chat and SMS 2</p> <p>Call Park</p> <p>Answering Rules</p> <p>Voicemail</p> <p>Barry Dog 16 days ago Transcription not available 02:59</p> <p>Office Manager 21 days ago Transcription not available 00:00 00:03</p> <p>House Grey a month ago Transcription not available 00:03</p>

Voicemail Greetings & Recorded Names

1. Navigate to the **Portal > My Account (if scope is Office Manager or above) > Messages > Settings**.
2. Across from **Greetings**, existing greetings and names can be played or downloaded.
3. If the only button you see is a "manage" button (a megaphone icon), then that means there are no Voicemail Greetings or Recorded Names configured for this user.

Greetings

Voicemail Greeting 

Recorded Name 

Add a Voicemail Greeting

Use the "manage" button (a megaphone icon) across from "Voicemail Greeting" to manage existing greetings and add new ones.

Greetings

Voicemail Greeting    

Recorded Name   

There are 3 options for adding a new greeting: (1) use text-to-speech to transform your typed words into computer-generated audio, (2) upload an existing MP3 or WAV file, or (3) call a number to record your greeting in real-time.

<h3>Text to speech</h3>	<p>New Greeting <input checked="" type="radio"/> Text-To-Speech ⓘ <input type="radio"/> Upload <input type="radio"/> Record</p> <p>Message <input type="text" value="I'm not here right now. Please leave a message."/></p> <p>Voice <input type="text" value="Allison (Watson)"/> </p> <p>Save</p> <p>Click the Save button to save this greeting.</p> <p>Type your voicemail greeting here.</p> <p>Click to hear a sample. This button will play your typed message in the selected "voice".</p>
<h3>Upload</h3>	<p>New Greeting <input type="radio"/> Text-To-Speech ⓘ <input checked="" type="radio"/> Upload <input type="radio"/> Record</p> <p>Greeting Name <input type="text" value="Sam's Voicemail"/></p> <p>Browse <input type="text" value="C:\fakepath\piano-suspenses-14427"/></p> <p>Upload</p> <p>Click to locate & upload your .MP3 or .WAV file.</p> <p>Click the Upload button to upload your file.</p> <p>Provide a descriptive name for this greeting.</p>

Manage Greetings

- New Greeting
- Text-To-Speech ⓘ
 - Upload
 - Record

Record

After selecting the "Record" option and then naming the greeting, decide where you want to be called. The system will call you at this number and ask you to record your greeting.

For on-net numbers (extensions), you must specify the device. For example, the user in this example is asking to be called at their WebPhone.

Call me at 

For off-net numbers (DIDs), you may be required to use the country code. Here's a U.S. example:

Call me at 

1. Press the Call button.
2. The system will call you at the number you entered.
3. Answer the call.
4. It will prompt you to record your greeting: "Start recording after the tone. Press pound when finished".
5. After pressing # (pound), you can hang up.
6. Then your recorded greeting will automatically be added to the refreshed table ("Ellen's Voicemail" in this example).

New Greeting Text-To-Speech ⓘ
 Upload
 Record

Greeting Name

Call me at

[Call](#)

Index	Greeting Name	Duration
 1	Ellen's Voicemail	0:09   

Delete a Voicemail Greeting

Voicemail Greetings can be downloaded, edited, or deleted by clicking on the respective button across from that greeting. They can also be sampled by clicking on the play button (to the left of the greeting).

Manage Greetings ✕

New Greeting Text-To-Speech ⓘ
 Upload
 Record

Greeting Name

Call me at

Call

Index	Greeting Name	Duration	Delete
 1	Standard Greeting	0:03	  
 2	Business Greeting	0:04	  
 3	This is Steve's voicemail box. Leave a message after the tone.	0:05	  

Create a Recorded Name

1. Use the "manage" button (a megaphone icon) across from "Recorded Name" to replace the existing name.
2. If the "manage" button is the only button across from "Recorded Name", that means this user has not created their name yet.
3. There are 3 options for adding a new name: (1) use text-to-speech to transform your typed words into computer-generated audio, (2) upload an existing MP3 or .WAV file, or (3) call a number to record your name in real-time. These are the same options that exist for adding a Voicemail Greeting. Refer to the above table for details. Note that the only difference is that only one Recorded Name can be stored, whereas multiple Voicemail Greetings can be stored. Adding a new Recorded Name will replace the existing file (if one exists).

Disable Voicemail Call Forwarding

"Securing your K7 One System" explains how to disable voicemail call forwarding. This security precaution is a recommended best practice to prevent call fraud.

Voicemail Limits

"Can I Set A Minimum Length For The Voicemail PIN That Clients Use?" is a useful article for enhancing voicemail security.

"How Can I Limit The Length Of A Voice Mail Recording?" explains how to set the "max v-mail" timer.

"How Do I Route Calls to Voicemail When a User's Call Limit is Reached?"

Voicemail Notifications

"Configure Email Notification for New Users' Voicemail"

Read about email notifications at the user level in the "Scheduled Export" section of "Call History Page & CDR2 Overview".

"Voicemail Reminders" was a feature introduced in v43.0. This is how to set up persistent notifications via email, phone, and/or SMS.

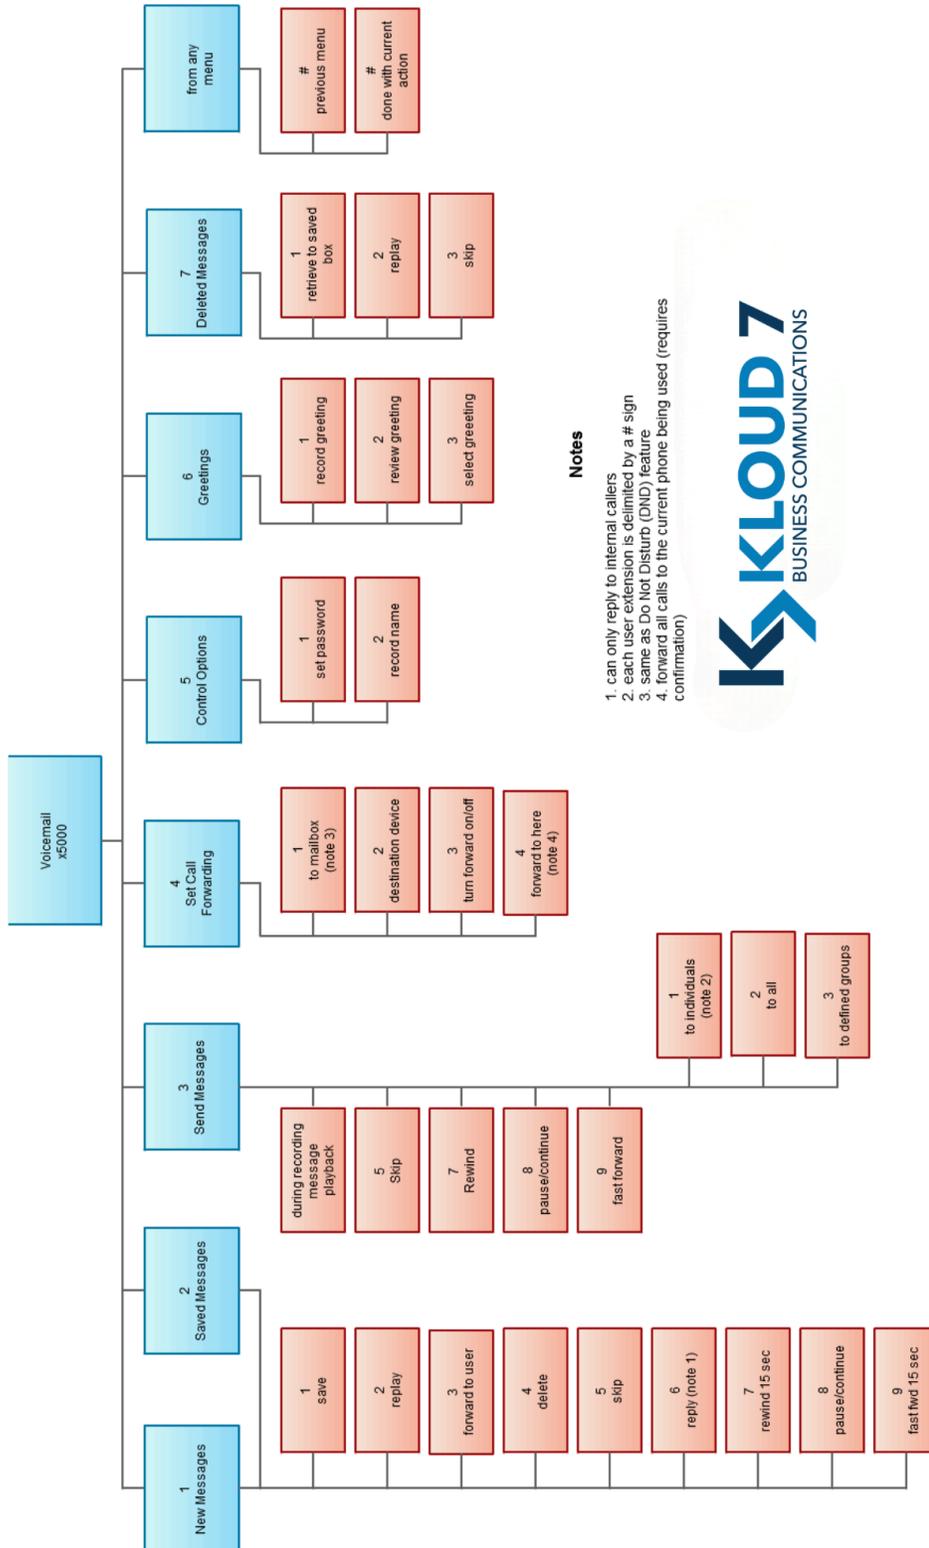
"Branding Notification Emails" includes a section on "Email Templates" and explains how to brand automatic emails when users have missed a call or received a voicemail message.

"Is It Possible To Copy A Voicemail To Another User And Keep My Copy?" explains how to automatically send a voicemail copy to a different mailbox than where the message was left.

Voicemail IVR Tree

IVR (Interactive Voice Response) is a computer technology that translates voice and dial tones into commands to route users to the correct place. For example, "press 1 to record a greeting" uses IVR technology. The user presses "1" on their phone, and the underlying technology understands the specific button tone, translating it into the appropriate action - letting the user record a greeting. More information about the types of menus can be found here, "Voicemail Menus".

The following IVR tree is what K7 One uses inside voicemail boxes:



Notes

1. can only reply to internal callers
2. each user extension is delimited by # sign
3. same as Do Not Disturb (DND) feature
4. forward all calls to the current phone being used (requires confirmation)

